
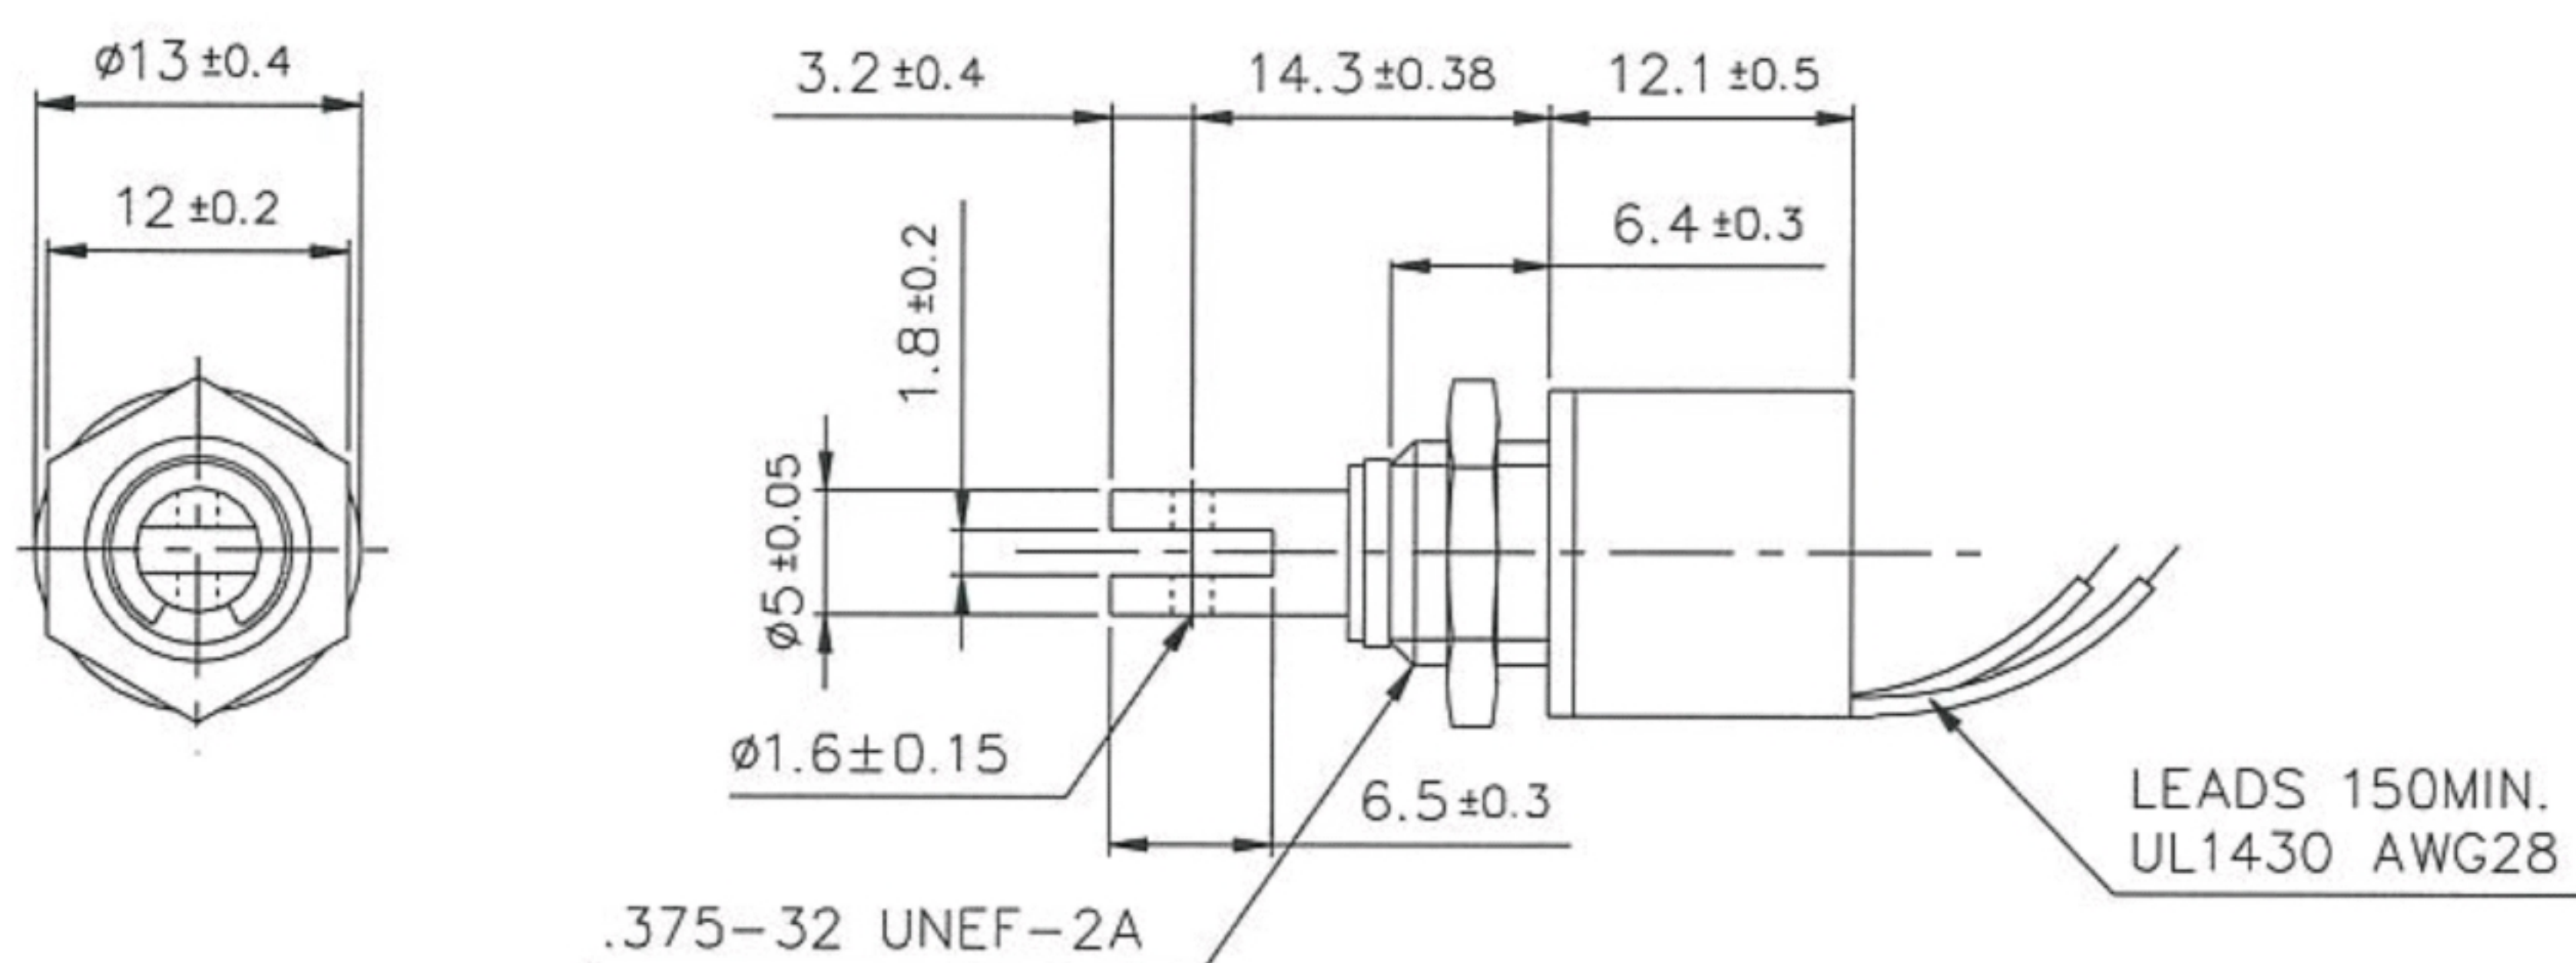



型号/Type no:HTT-1312L

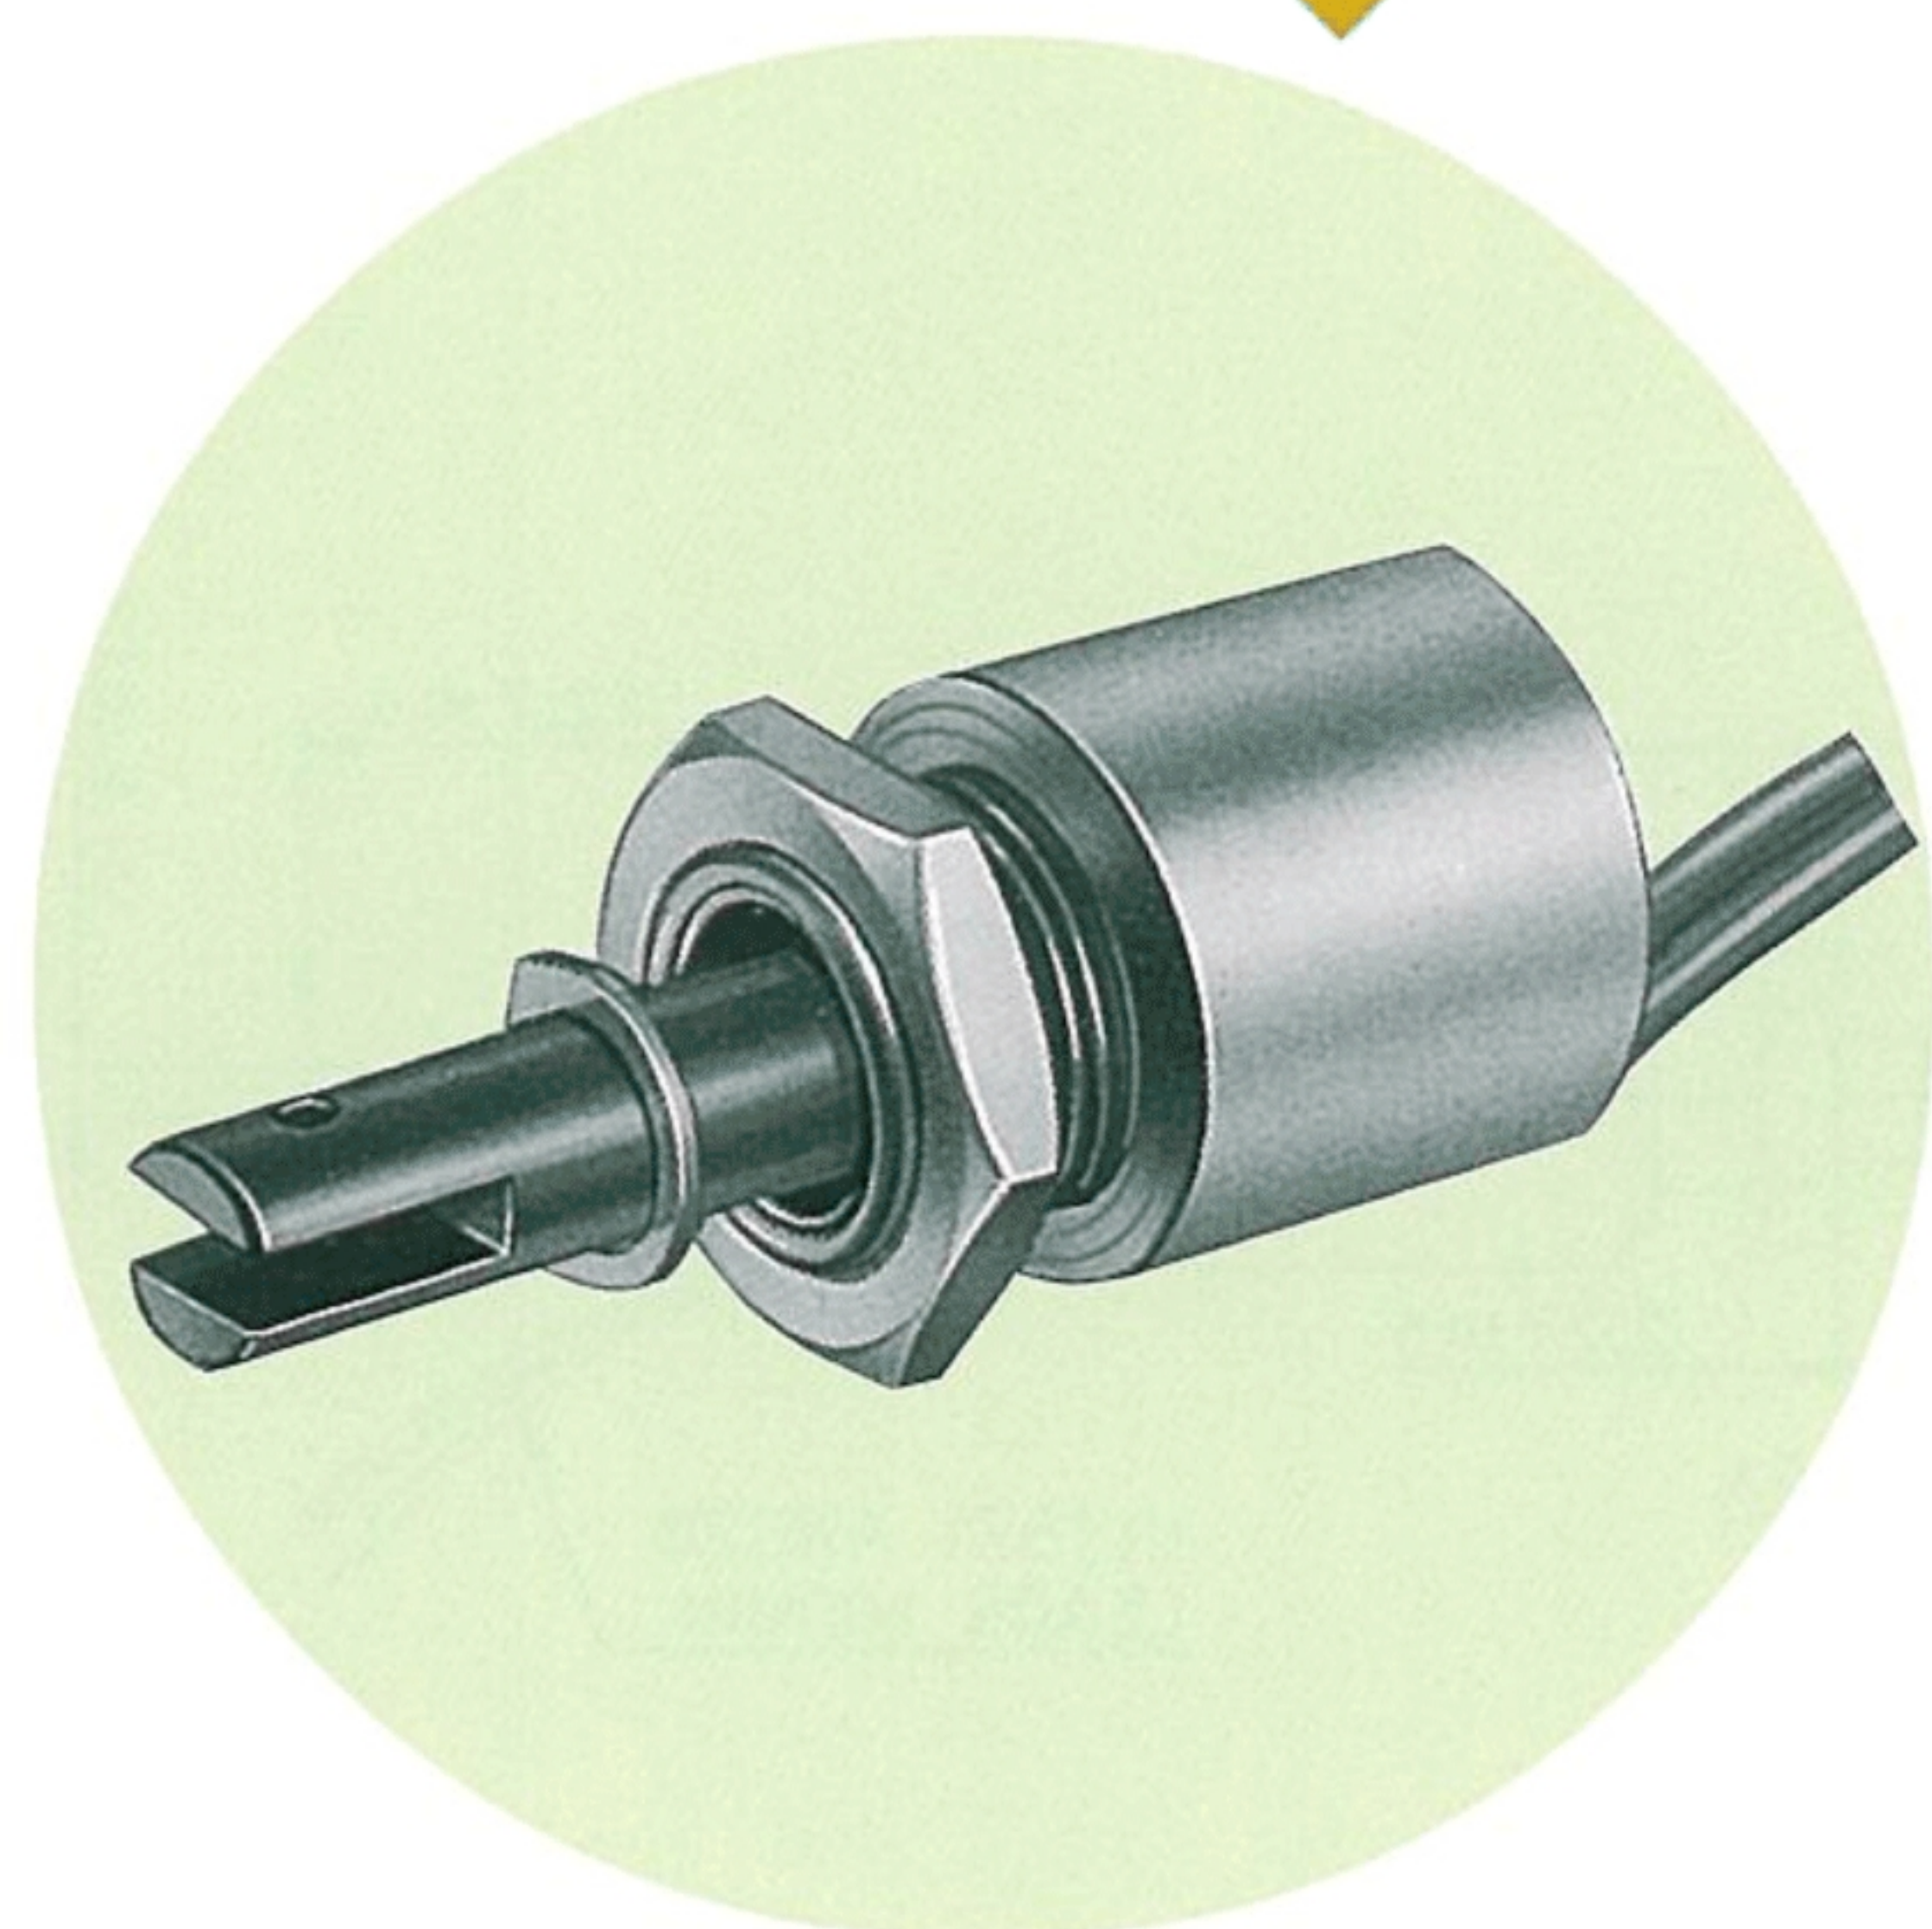


Plunger Weight 可动铁心重量 : 4g
Total Weight 总重量 : 15g

Shown Energized 通电状态 UNIT 单位: mm


STROKE Vs FORCE 行程 / 吸引力

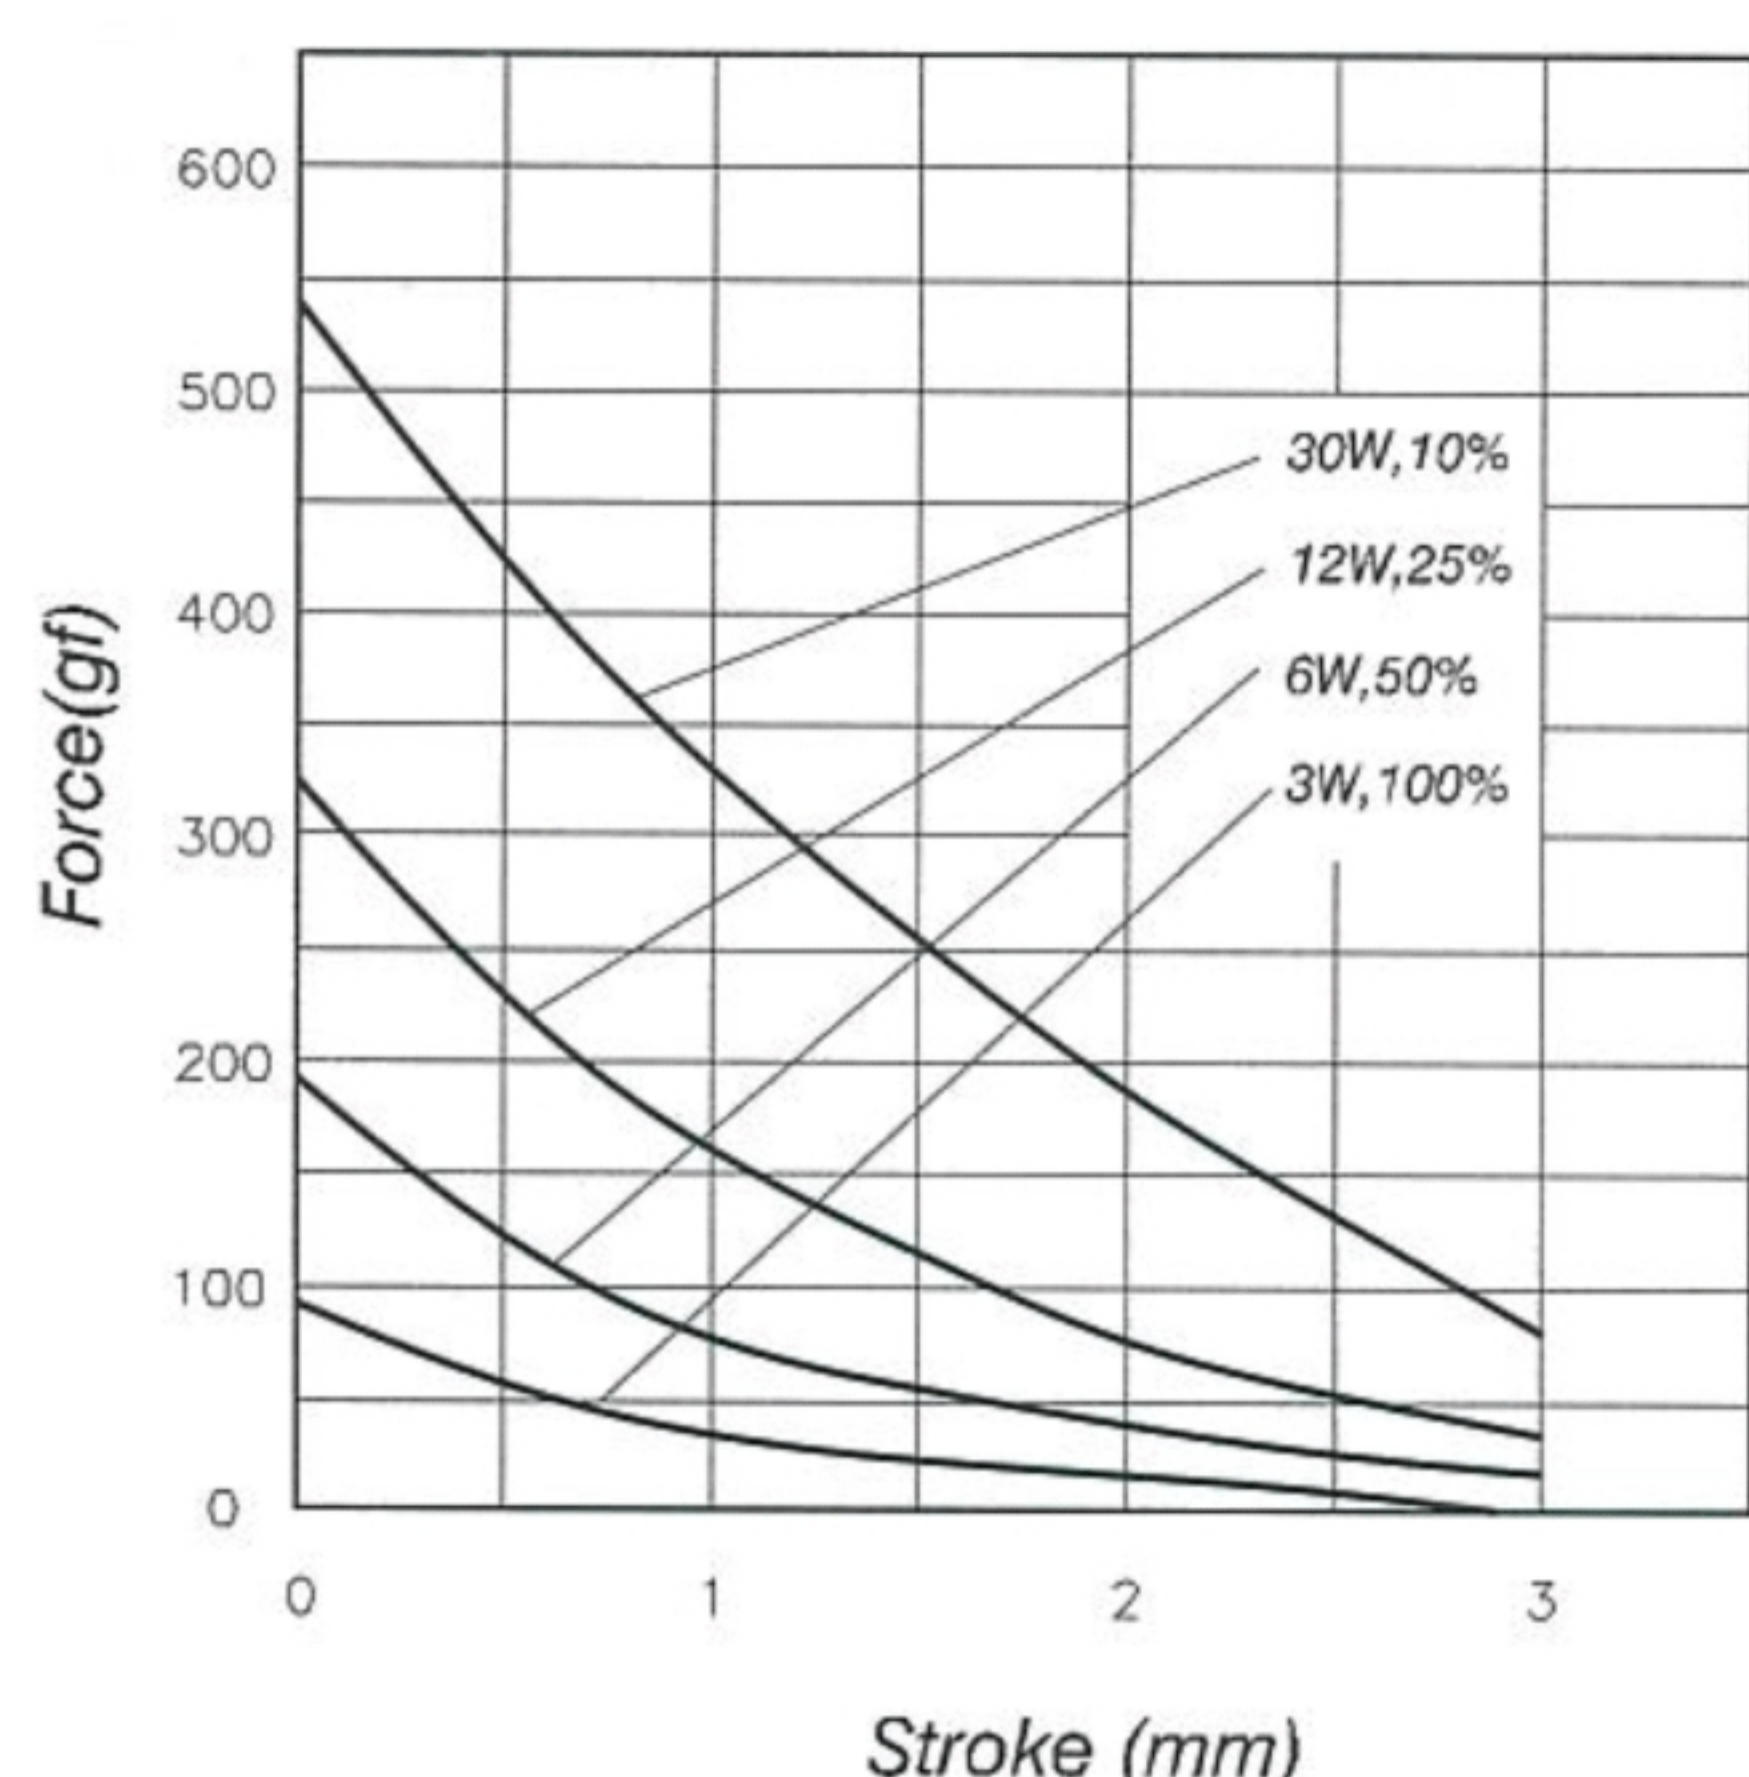

STROKE Vs RESPONSE TIME 行程 / 反应时间

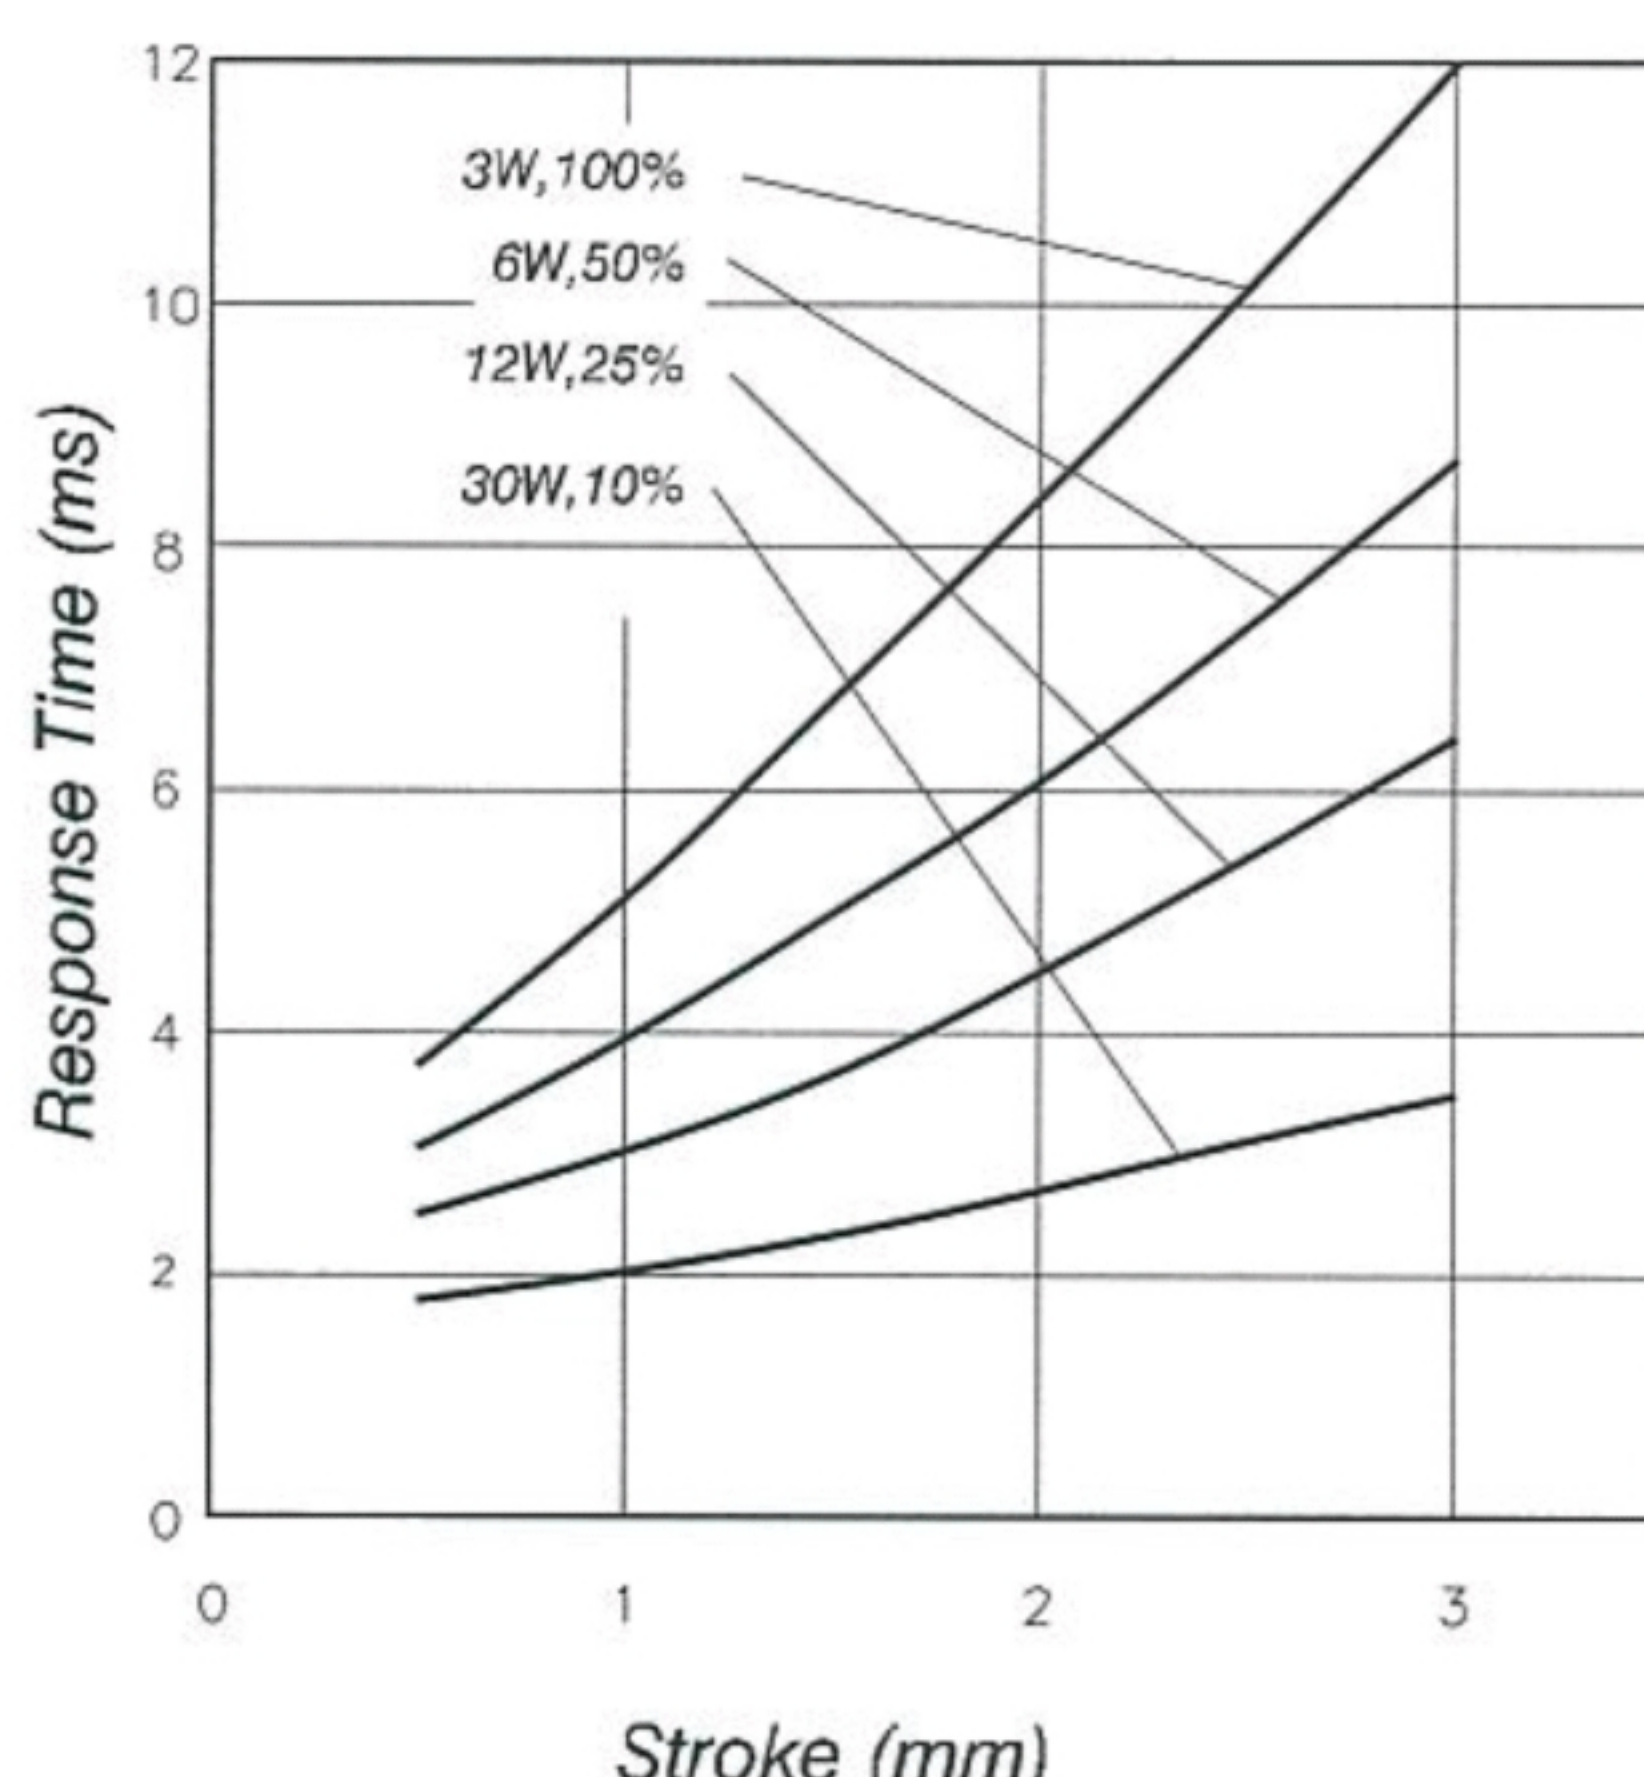

AMPERE-TURNS Vs FORCE 安-匝 / 吸引力

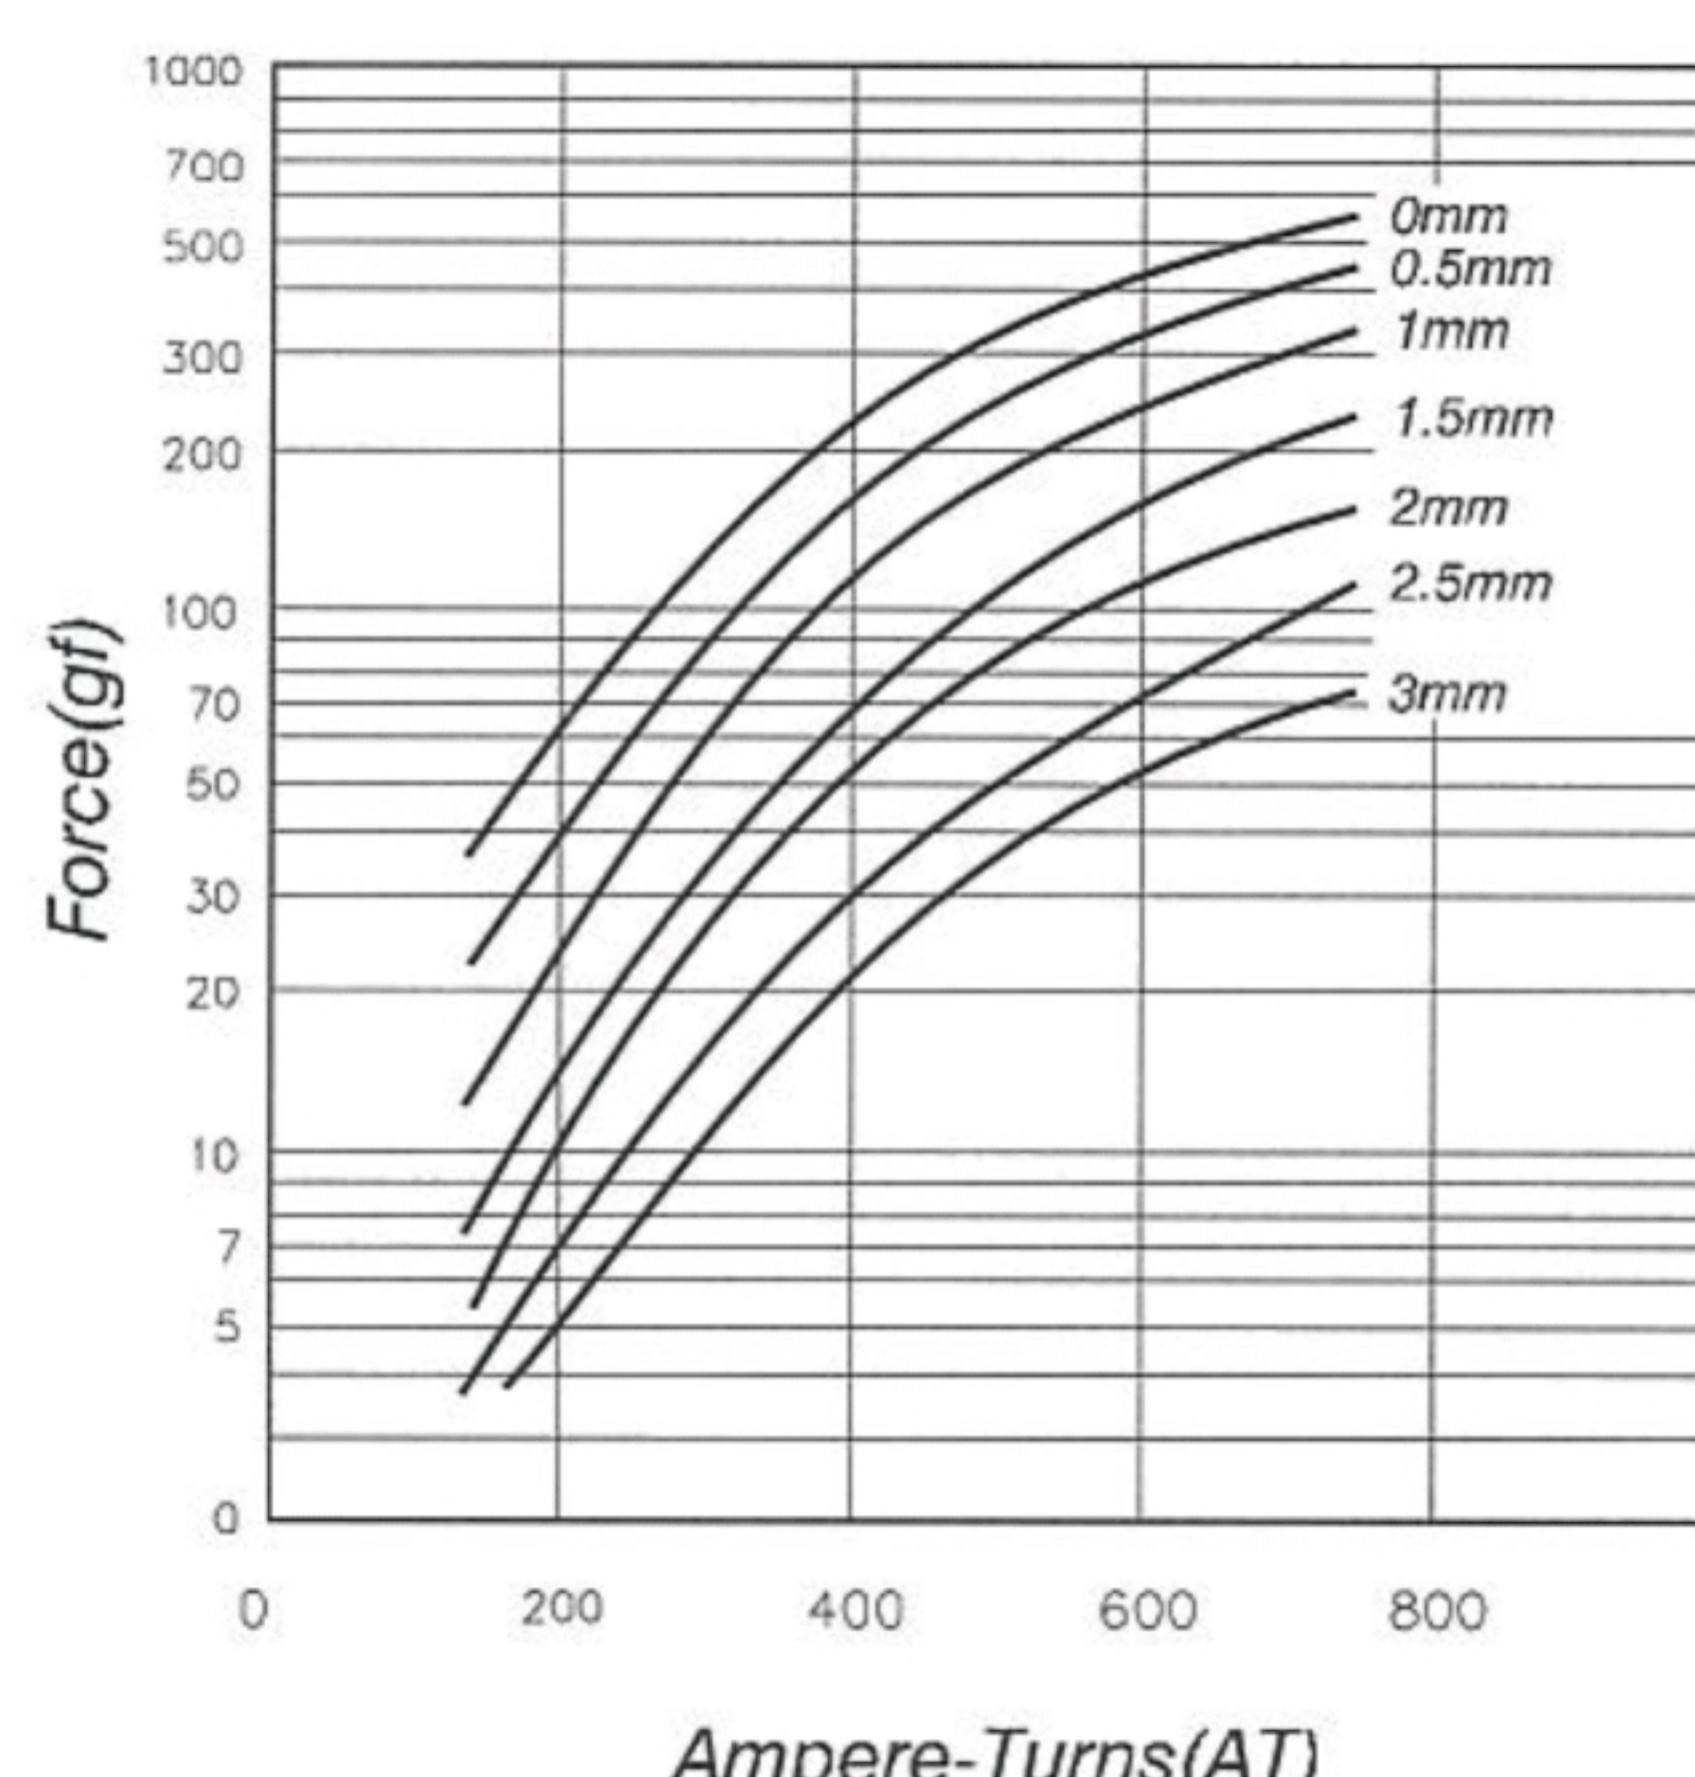

COIL DATA 线圈资料

Heat Sink: 50 × 50 × 3mm (aluminum)
散热片: 50 × 50 × 3mm (铝)

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ 动作周期(%) = $\frac{\text{ON 时间}}{\text{ON 时间} + \text{OFF 时间}} \times 100\%$			Continuous (100%) 连续 (100%)	Or less (50%) 间断 (50%)	Or less (25%) 间断 (25%)	Or less (10%) 间断 (10%)
MAX. "on" time in seconds 最大 ON 时间(秒)			∞	38	4	1
Watts at 20°C 瓦特数(W) (在 20°C)			3	6	12	30
Ampere-turns at 20°C AT 值 (在 20°C)			232	330	465	735
Type no.	Resistance (20°C) Ω ± 10%	No. turns	Volts DC 电压			
型号	阻值 (Ω) ± 10%	绕线圈数				
HTT-1312L03AA	3	232	3	4.2	6	9.5
HTT-1312L06AA	12	464	6	8.5	12	19
HTT-1312L12AA	48	928	12	17	24	38
HTT-1312L24AA	192	1856	24	34	48	76