
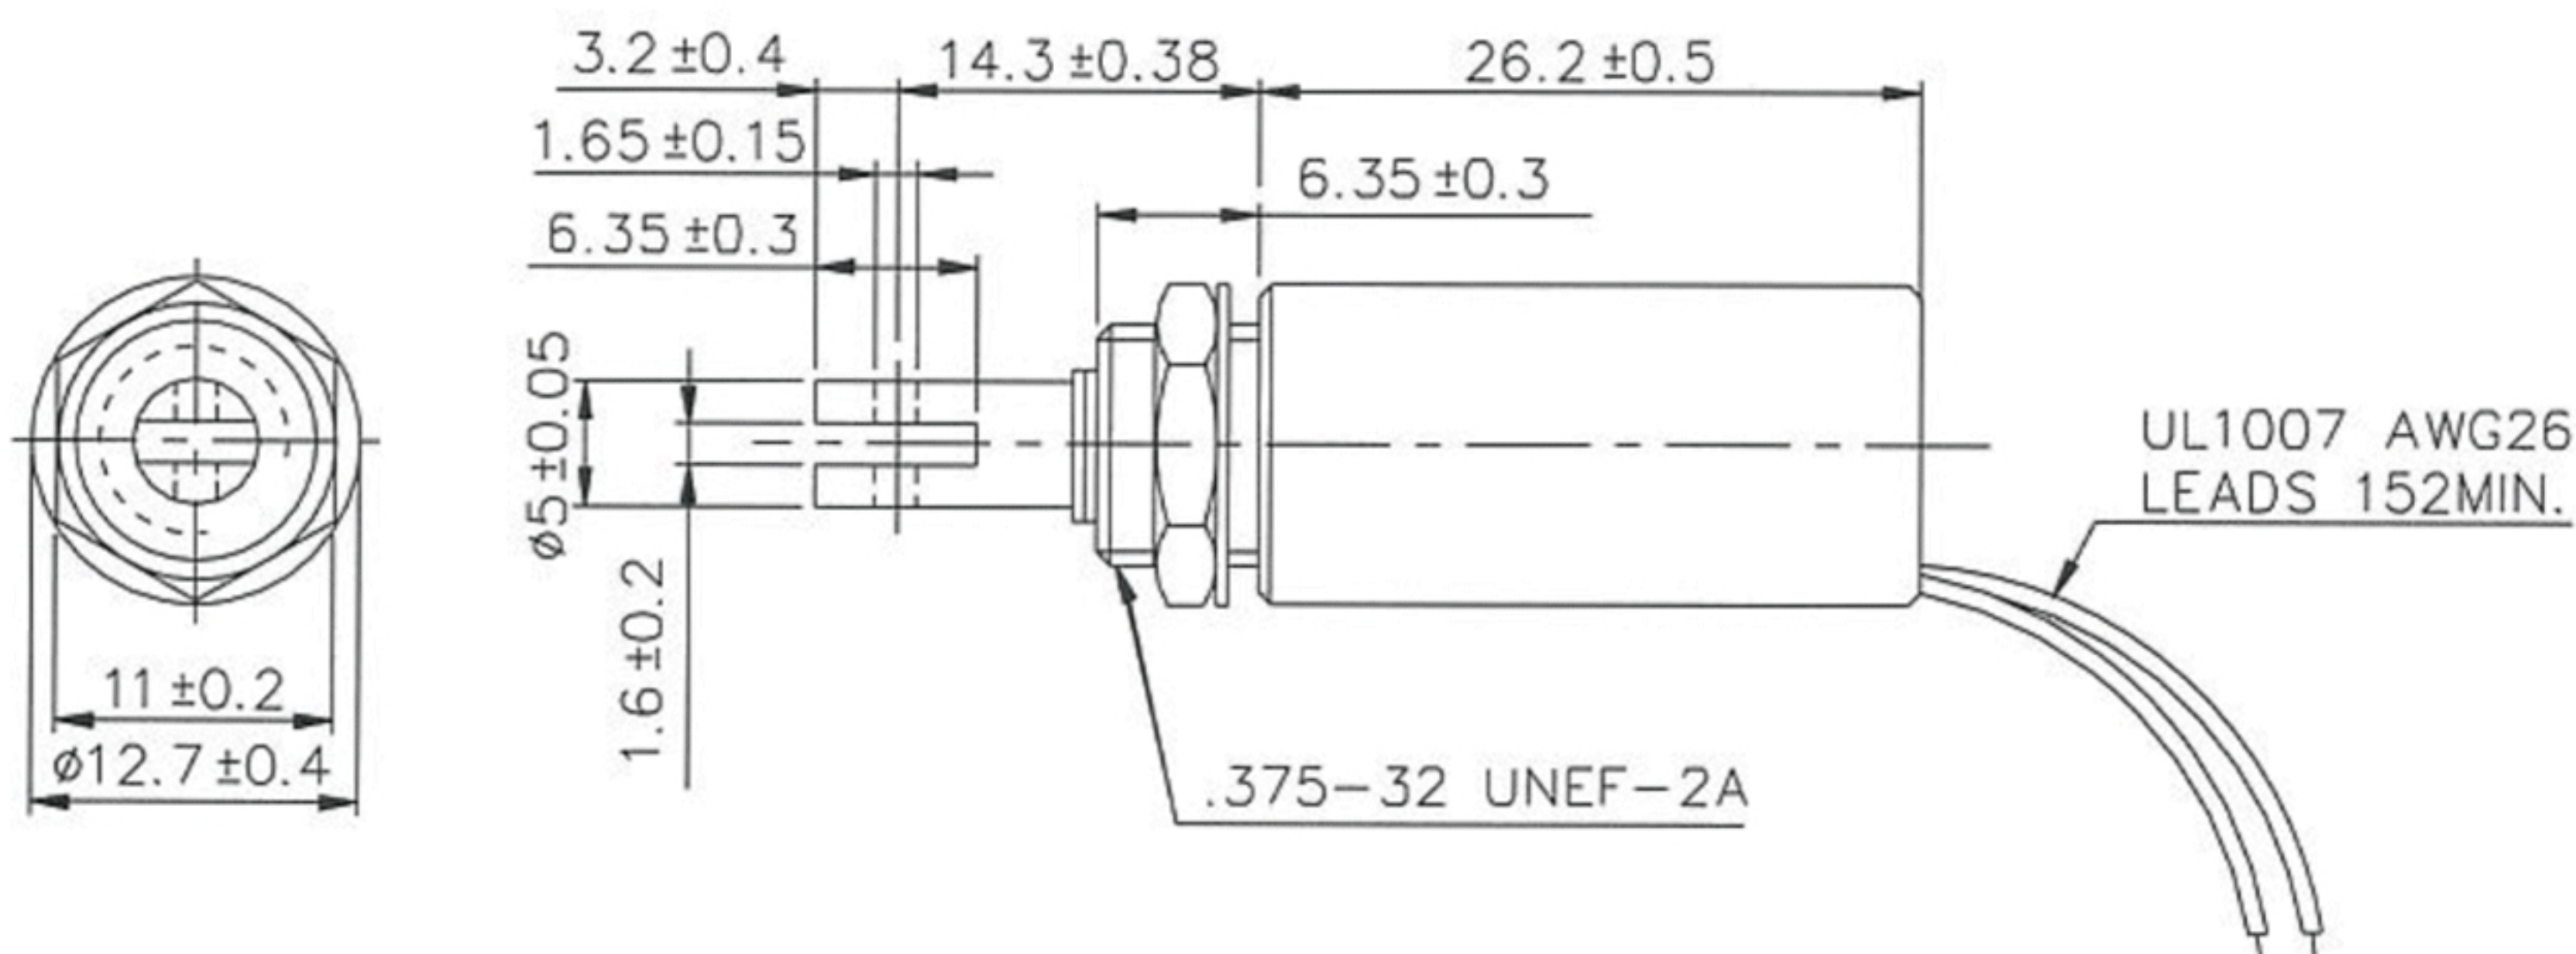


型号/Type no: HTT-1325L

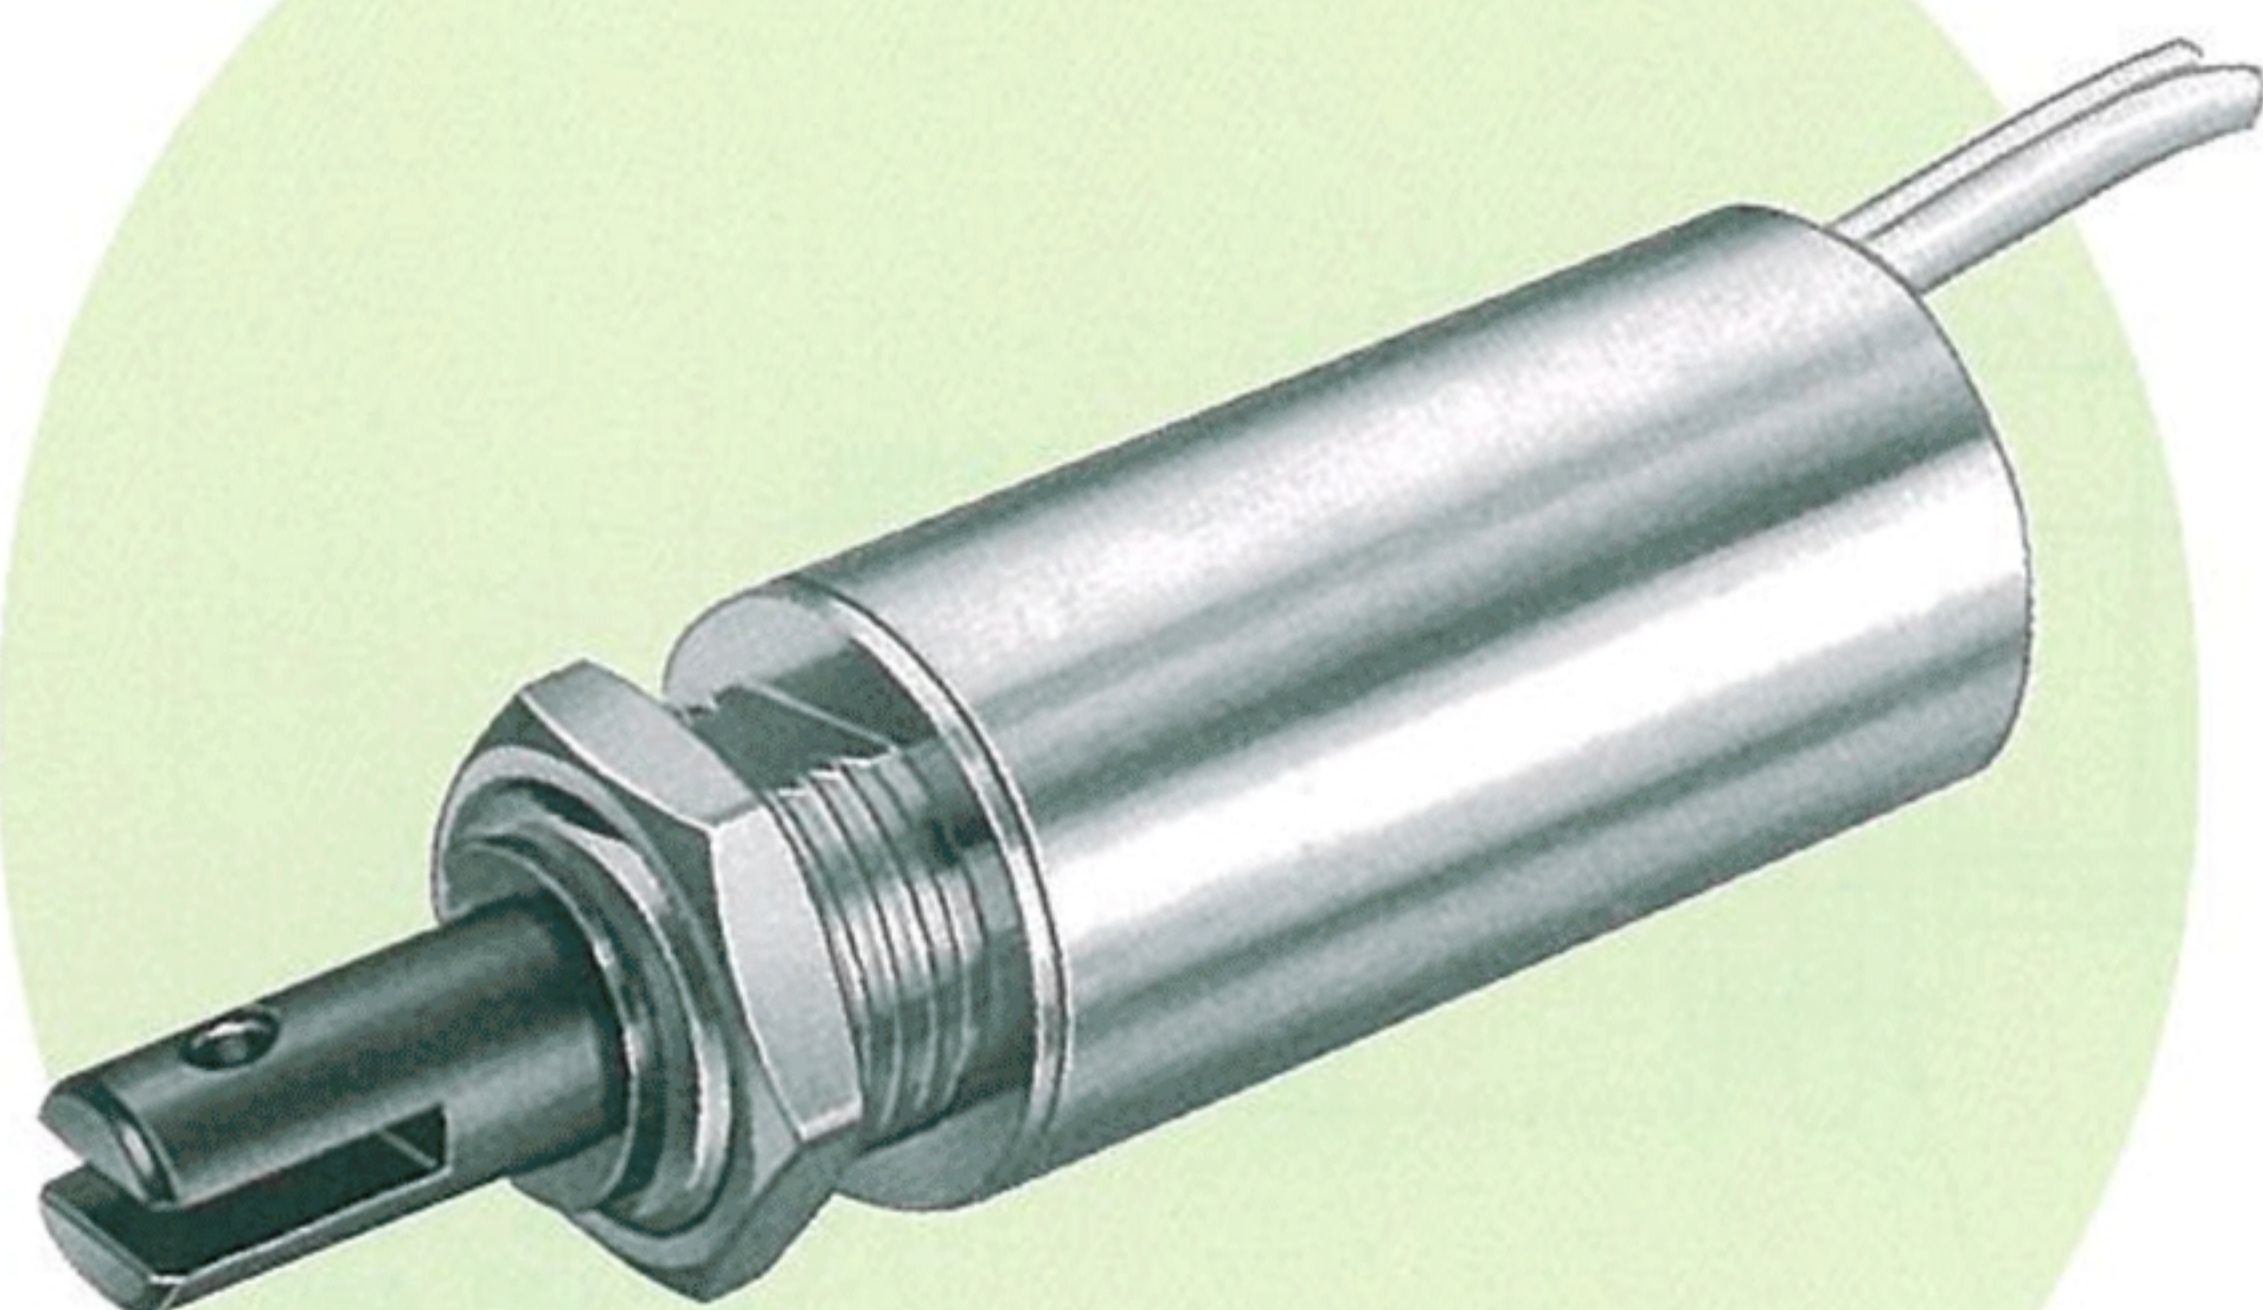


Plunger Weight 可动铁心重量 : 4.9g
Total Weight 总重量 : 23g

Shown Energized 通电状态 UNIT 单位: mm


STROKE Vs FORCE

行程 / 吸引力

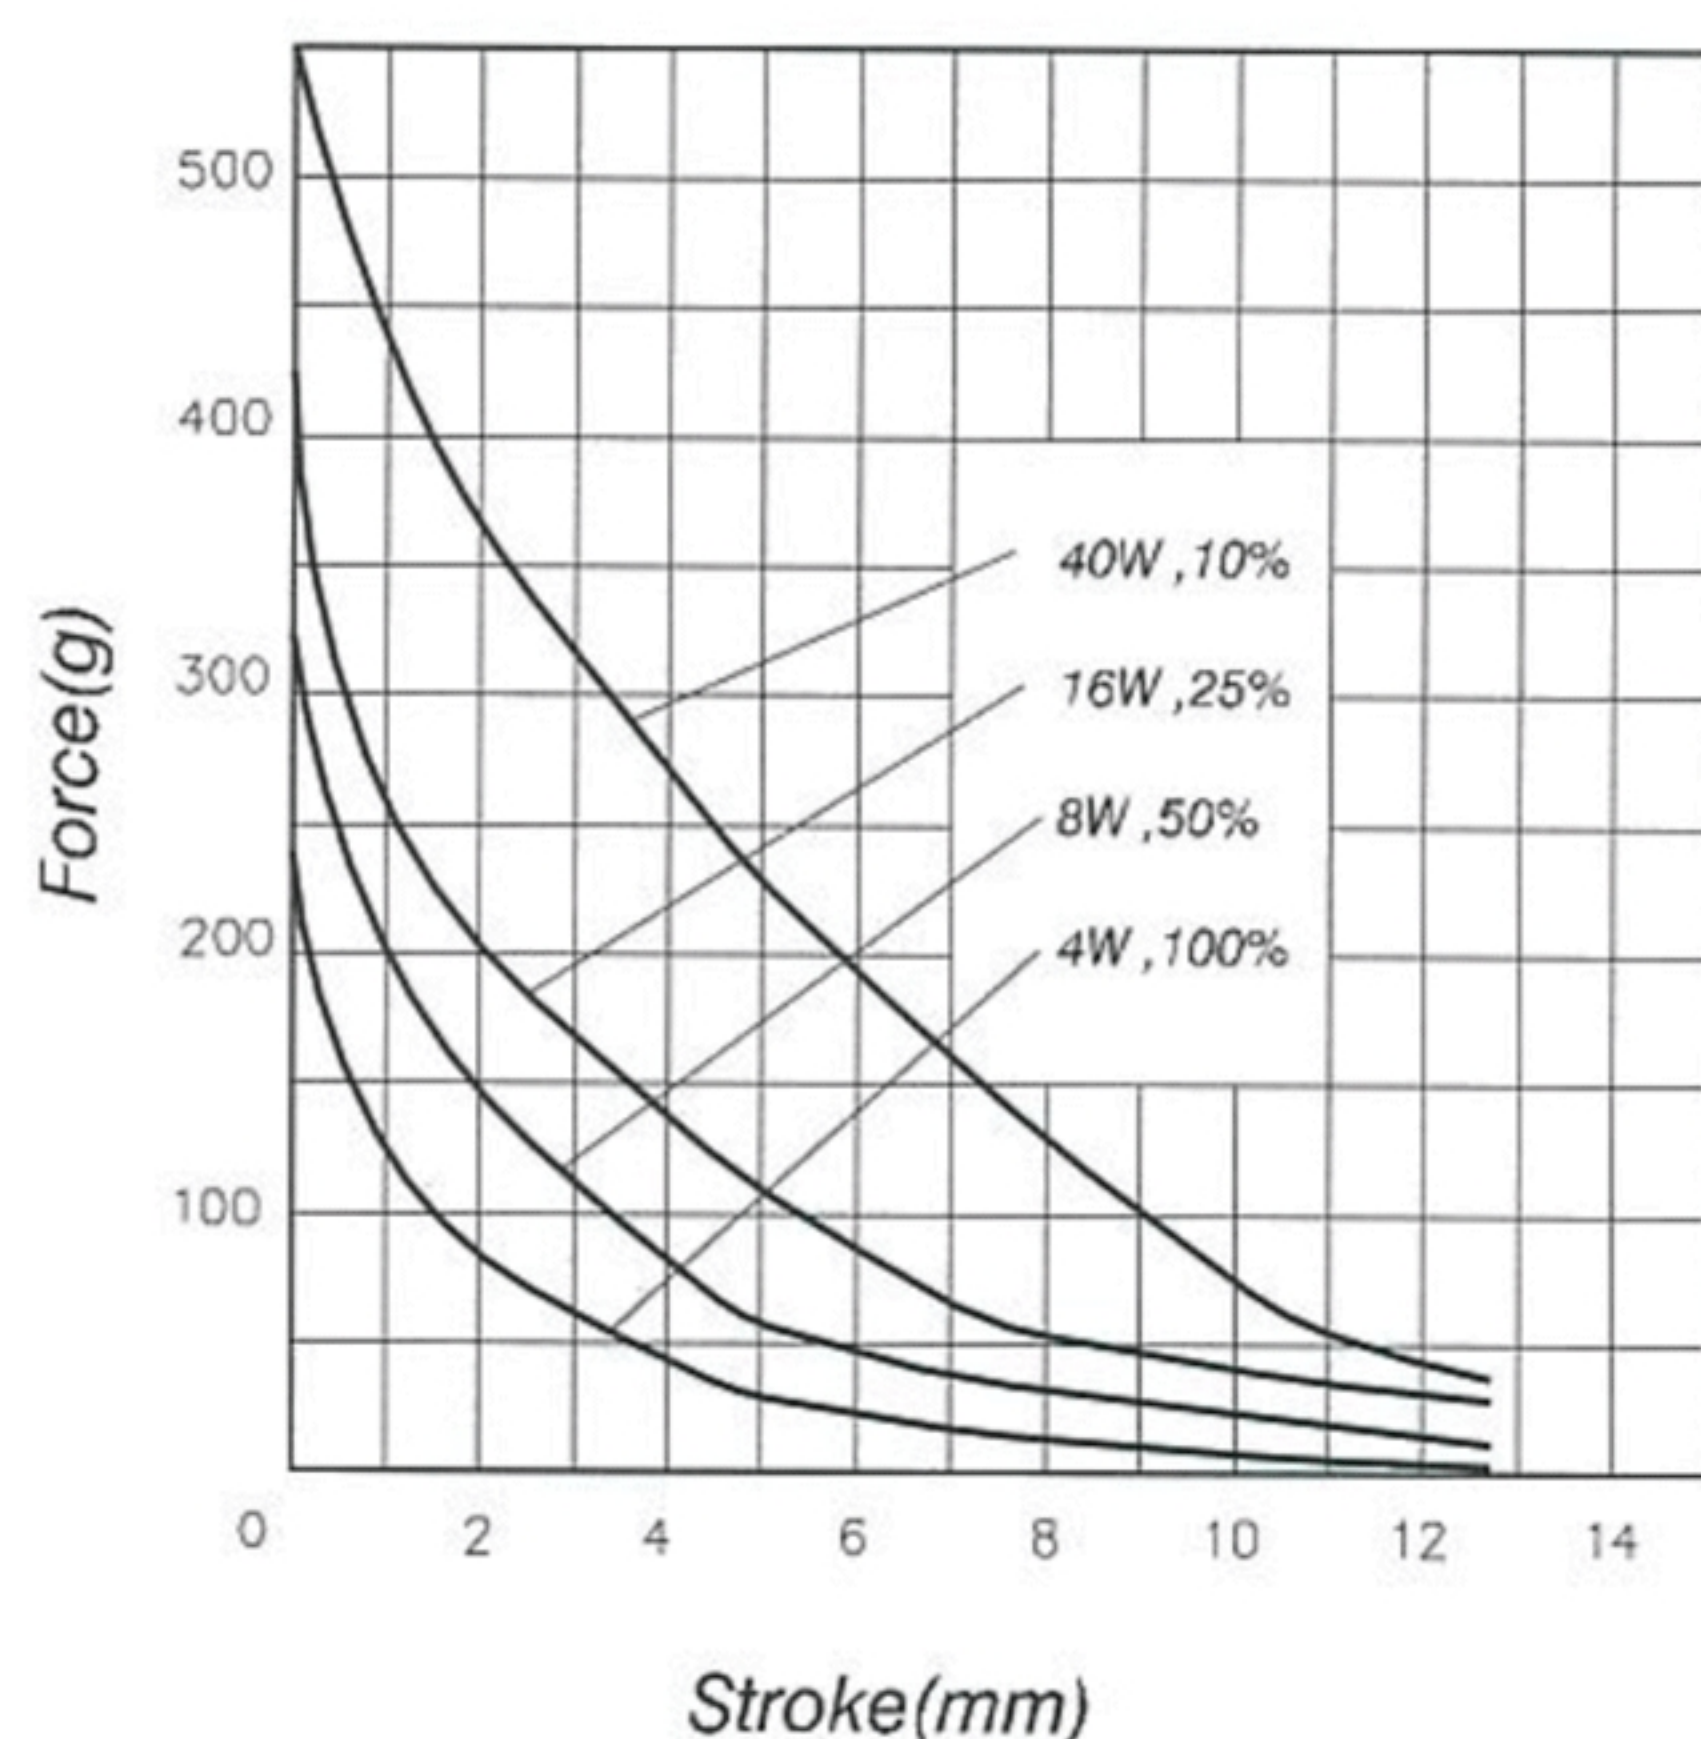


STROKE Vs RESPONSE TIME

行程 / 反应时间

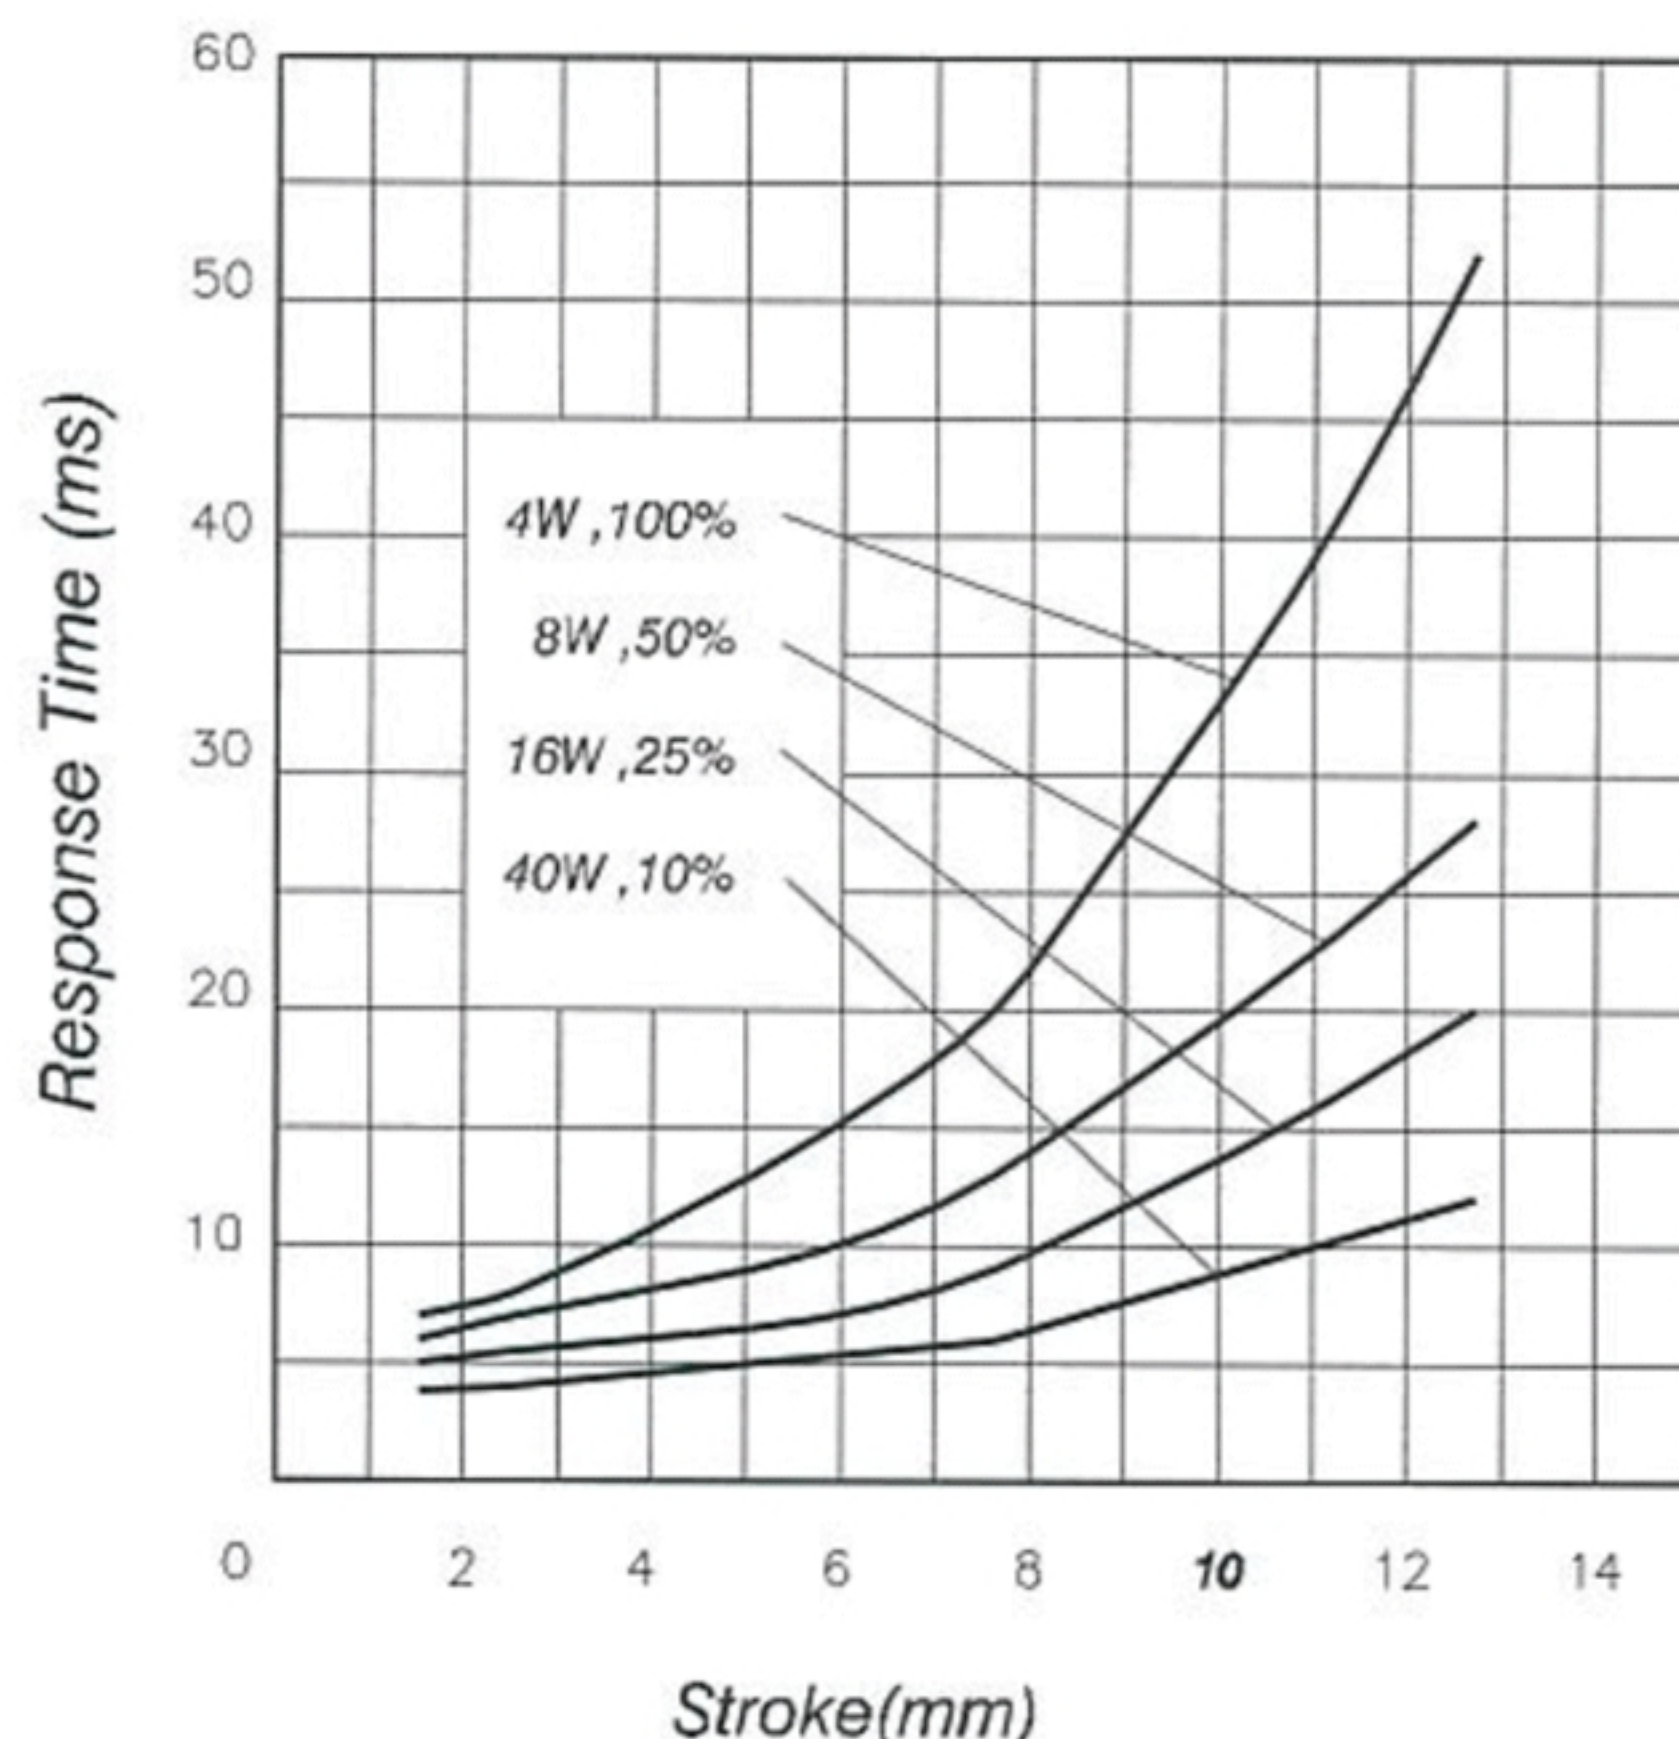

AMPERE-TURNS Vs FORCE

安-匝 / 吸引力

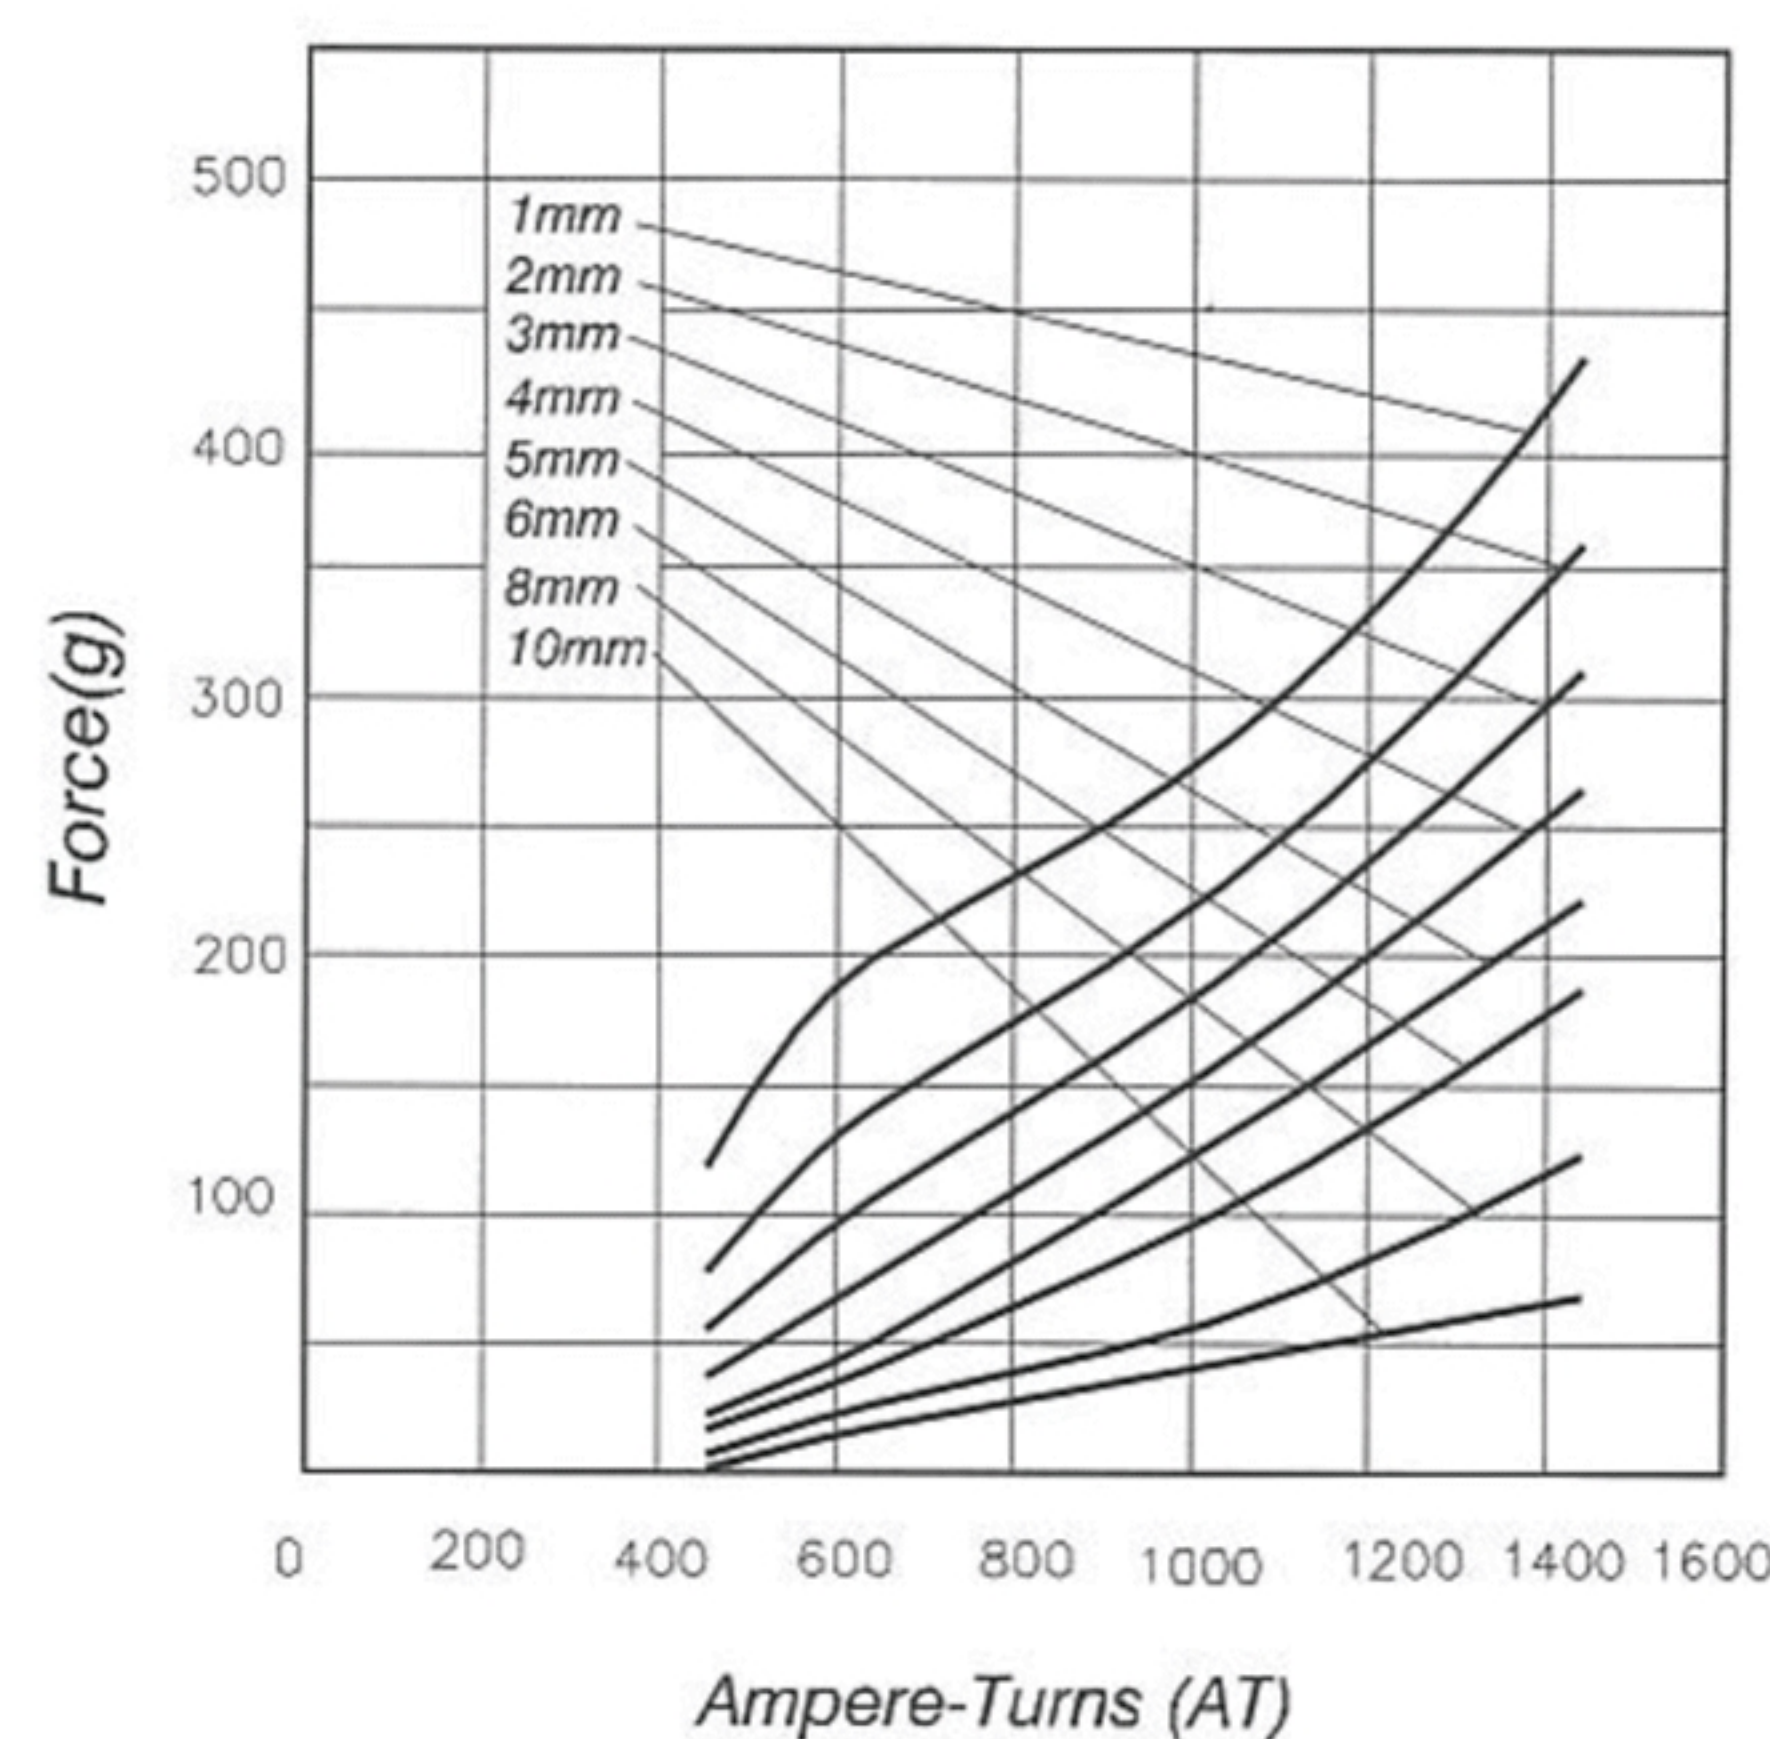

COIL DATA 线圈资料

Heat Sink: 50 × 50 × 3mm (aluminum)
散热片: 50 × 50 × 3mm (铝)

Duty cycle (%) = $\frac{\text{“ON” time}}{\text{“ON” time} + \text{“OFF” time}} \times 100\%$			Continuous (100%)	Or less (50%)	Or less (25%)	Or less (10%)
作动周期(%) = $\frac{\text{ON 时间}}{\text{ON时间+ OFF时间}} \times 100\%$			连续 (100%)	间断 (50%)	间断 (25%)	间断 (10%)
MAX. “on” time in seconds 最大 ON 时间 (秒)			∞	50	5	2
Watts at 20°C 瓦特数(W) (在 20°C)			4	8	16	40
Ampere-turns at 20°C AT 值 (在 20°C)			453	640	905	1440
Type no.	Resistance (20°C) Ω ± 10%	No. turns	Volts DC			
型号	阻 值 (Ω) ± 10%	绕线圈数	电 压			
HTT-1325S06AA	9	680	6	8.5	12	19
HTT-1325S12AA	36	1359	12	17	24	38
HTT-1325S24AA	144	2700	24	34	48	76
HTT-1325S48AA	576	5400	48	68	96	152